

Integrated solenoid valve (3/2 way)

CPV15S Series



Product feature

1. Integrated installation centralizes air intake, exhaust and power(25pin D-Sub)to save space and reduce additional accessories.
2. Flexible combination and expandability for various applications. Blank plates are optional.
3. Equipped with manual override for quick air circuit checking.
4. Low starting voltage and long service life.

Specification

Model		CPV15SB	CPV15SF
Integrated solenoid valve	Fluid	Air(to be filtered by 40 μm filter element)	
	Acting	Direct acting	
	Number of stations	2 stations ~20 stations, only available in even stations	
	Electrical entry	Terminal, 25pin D-Sub	
	Port size	1/8" [Note1]	
		PT thread	
		G thread	
		NPT thread	
Coil	The type of Inlet and exhaust	Centralized inlet and exhaust	
	Operating pressure	0.15~0.8MPa(21~114psi)	
	Proof pressure	1.2MPa(175psi)	
	Temperature	-20~70℃	
	Protection	Dustproof	
	Standard voltage	DC24V	DC12V
	Scope of voltage	DC±10%	
	Temperature classification	F Class	
	Power consumption	DC: 1.6W	

[Note1] PT thread, G thread and NPT thread are available.

Ordering code

CPV15S B 20F □


① ② ③ ④

① Model	② Voltage	③ Number of stations	④ Thread type
CPV15S: CPV15S series integrated solenoid valve	B: DC24V F: DC12V	2F: 2 stations 3F: 3stations 4F: 4stations 20F: 20stations	Blank: PT G: G T: NPT

Installation and Application


Assembly of micro-solenoid valve (blank plate) and manifold

Mount micro-solenoid valve and manifold by two M2.5 screws as following .
Mount blank plate and manifold by two M2.5 countersunk screws as following .

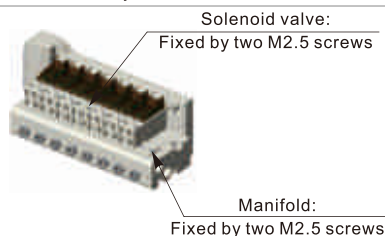


Expansion of micro-solenoid valve

Remove blank plate and install solenoid valve by the assembly instruction.




A port tubing

A port is at the side of manifold with push in fittings.



Manifold mounting


Both sides of manifold attach two installing through-holes, using two M4 hexagon cap screws to fix.

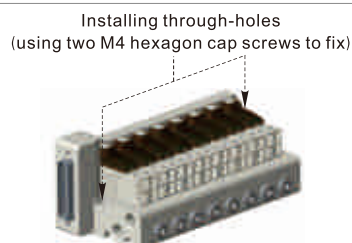


Integrated solenoid valve (3/2 way)

CPV15S Series

Dimensions

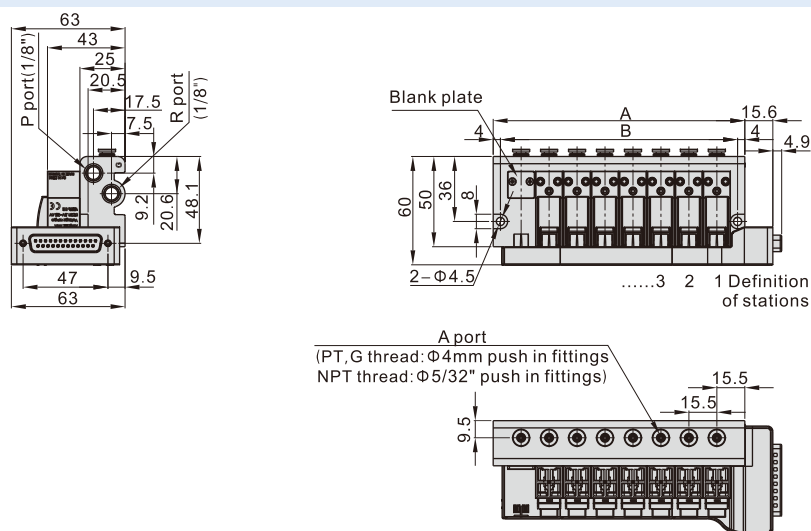

Item\Number of stations	2F	4F	6F	8F	10F	12F	14F	16F	18F	20F
A	46.5	77.5	108.5	139.5	170.5	201.5	232.5	263.5	294.5	325.5
B	38.5	69.5	100.5	131.5	162.5	193.5	224.5	255.5	286.5	317.5



Terminal no.	Polarity		Control object	Terminal no.	Polarity		Control object
	-COM	+COM			-COM	+COM	
1	(+)	(-)	13 station	14	(+)	(-)	1 station
2	(+)	(-)	14 station	15	(+)	(-)	2 station
3	(+)	(-)	15 station	16	(+)	(-)	3 station
4	(+)	(-)	16 station	17	(+)	(-)	4 station
5	(+)	(-)	17 station	18	(+)	(-)	5 station
6	(+)	(-)	18 station	19	(+)	(-)	6 station
7	(+)	(-)	19 station	20	(+)	(-)	7 station
8	(+)	(-)	20 station	21	(+)	(-)	8 station
9			Void	22	(+)	(-)	9 station
10			Void	23	(+)	(-)	10 station
11			Void	24	(+)	(-)	11 station
12			Void	25	(+)	(-)	12 station
13	(-)	(+)	COM				

[Note] The D-sub cable of the corresponding Pin no. 13 (COM) should be less than or equal to 22AWG.